Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 15077

1002-15 P T B T S
1 2 3 4 5 6

1	NO. OF PINS	:	15, 26, 44, 62, 78
2	CONTACT TYPE	:	P-Male S-Female
3	SHELL PLATED	:	T-Tin shell Z-Zinc shell
4	INSULATOR COLOR	:	B-blue K-black W-white
5	MOUNTING TYPE	:	T - Through hole type N - with UNC#4-40 nut type
6	CONTACT PLATED	:	S - Tin plated on terminal & gold plated on contact G - All gold plated

MALE

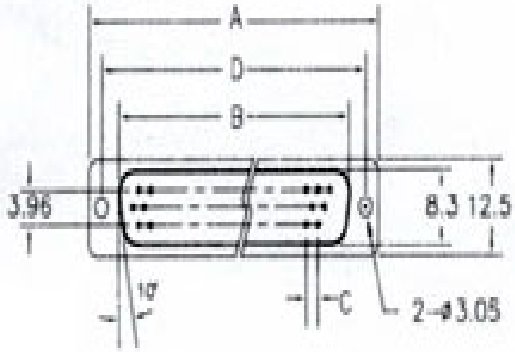

FEMALE

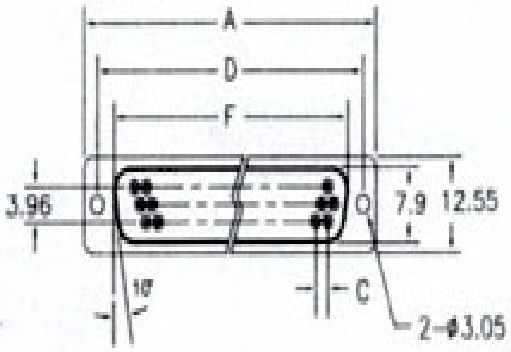

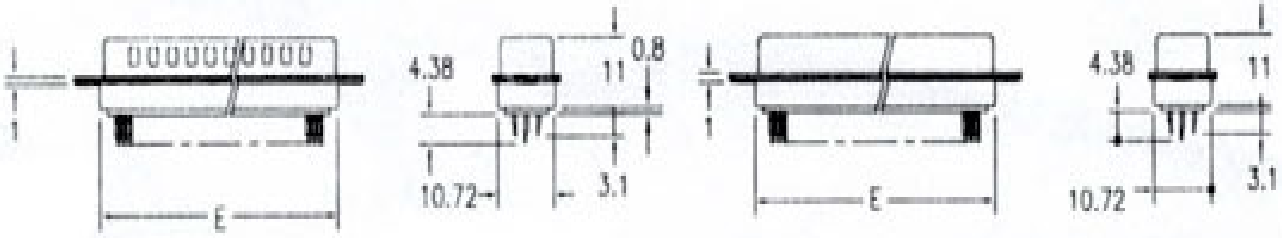

D-SUB H.D. SOLDER TYPE

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA
Insulator Resistance: 1000MΩmin. at DC 500V
Current Rating: 3 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
Operating Temperature: −55°C~+105°C
Contact: Brass or Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-0)

Dimension

Position	A	B	C	D	E	F
15	30.8	16.9	2.29	24.99	19.3	16.3
26	39.1	25.3	2.29	33.32	27.5	24.7
44	53.0	39.0	2.29	47.04	41.3	38.4
62	69.3	55.4	2.41	63.50	57.7	54.8
78	66.9	52.86	2.41	61.11	55.3	52.34